

Coaxial

Adapter, SMA-M to SMA-M

SM-SM50+

50Ω

DC to 18 GHz



Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR, 1.10:1 typ. up to 12.4 GHz and 1.15:1 typ. up to 18 GHz
- low cost adapters, available from stock
- rugged stainless steel body

CASE STYLE: DJ951

Connectors	Model	Price	Qty.
Conn1 SMA-M	Conn2 SMA-M	SM-SM50+	\$5.95 ea. (1-49)


Applications

- interconnection of RF cables and equipment

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

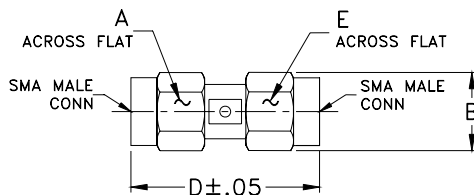

Outline Dimensions (inch/mm)



A	B	C	D	E	wt
.312	.36	--	.87	.312	grams
7.92	9.14	--	22.10	7.92	4.8

Electrical Specifications T_{AMB}=25°C

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.		
		DC-8 GHz	DC-12.4 GHz	DC-18 GHz
f _L -f _U	Typ.			
DC-18	0.05	1.12	1.30	1.40

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-M	SMA-M
10.00	0.01	1.00	1.00
50.00	0.01	1.00	1.00
100.00	0.01	1.00	1.00
500.00	0.03	1.01	1.01
1000.00	0.05	1.01	1.01
2000.00	0.05	1.02	1.02
3000.00	0.05	1.03	1.03
4000.00	0.06	1.03	1.04
5000.00	0.06	1.03	1.04
6000.00	0.07	1.03	1.05
7000.00	0.08	1.03	1.03
8000.00	0.08	1.03	1.03
9000.00	0.08	1.05	1.07
10000.00	0.10	1.10	1.12
11000.00	0.14	1.13	1.17
12000.00	0.14	1.14	1.19
13000.00	0.16	1.13	1.17
14000.00	0.16	1.13	1.13
16000.00	0.14	1.05	1.07
18000.00	0.21	1.08	1.14

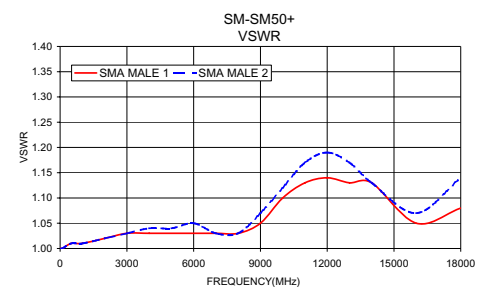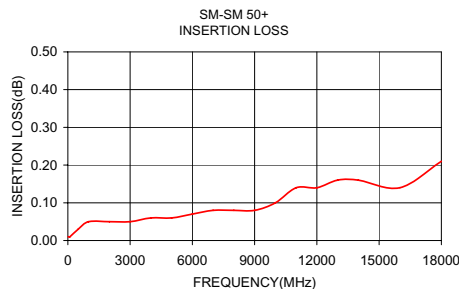

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp





www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. B
 M98898
 SM-SM50+
 ED-10283
 YB/TD/CP
 130913
 Page 1 of 1


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-MALE 1 RETURN LOSS (dB)	SMA-MALE 2 RETURN LOSS (dB)
10	0.01	46.06	46.06
50	0.01	46.06	46.06
100	0.01	46.06	46.06
500	0.03	46.06	46.06
1000	0.05	46.06	46.06
2000	0.05	40.09	40.09
3000	0.05	36.61	36.61
4000	0.06	36.61	34.15
5000	0.06	36.61	34.15
6000	0.07	36.61	32.26
7000	0.08	36.61	36.61
8000	0.08	36.61	36.61
9000	0.08	32.26	29.42
10000	0.10	26.44	24.94
11000	0.14	24.29	22.12
12000	0.14	23.69	21.23
13000	0.16	24.29	22.12
14000	0.16	24.29	24.29
16000	0.14	32.26	29.42
18000	0.21	28.30	23.69

Typical Performance Curves

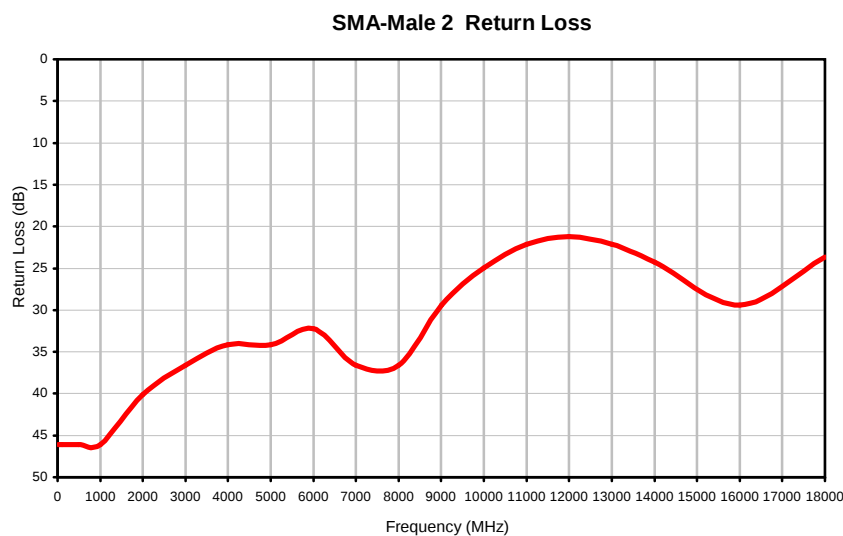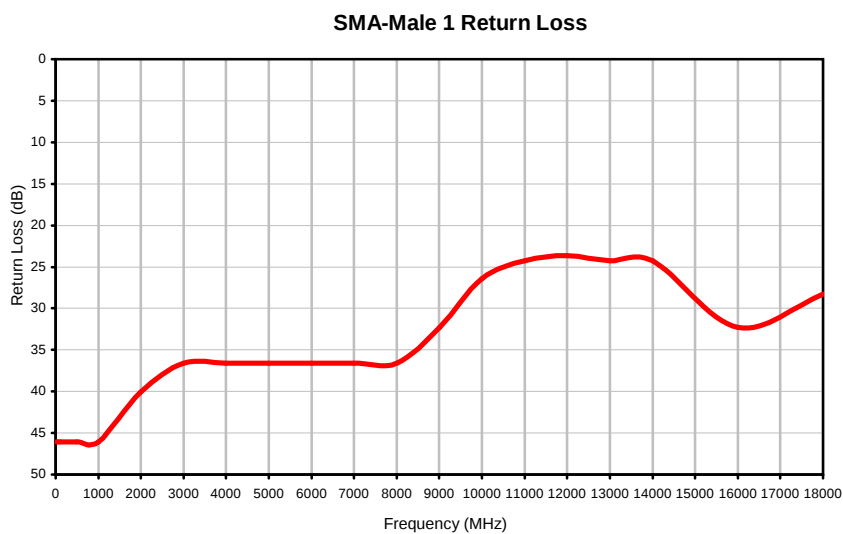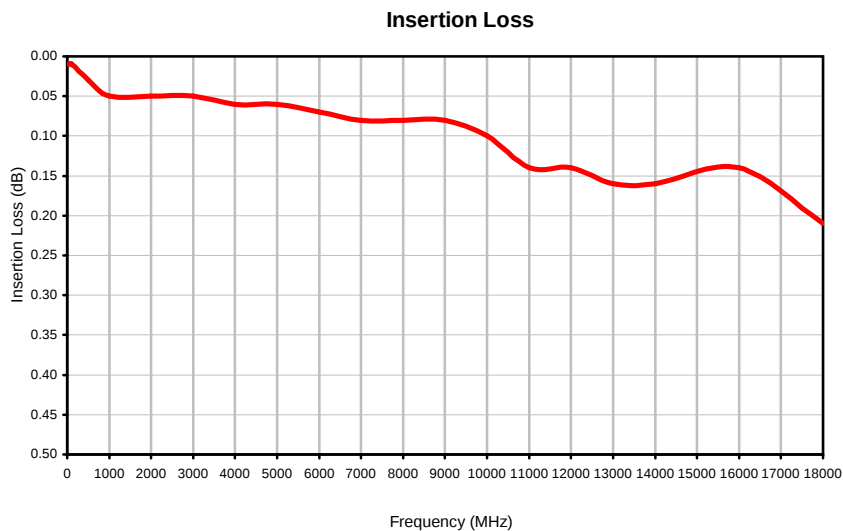

Outline Dimensions

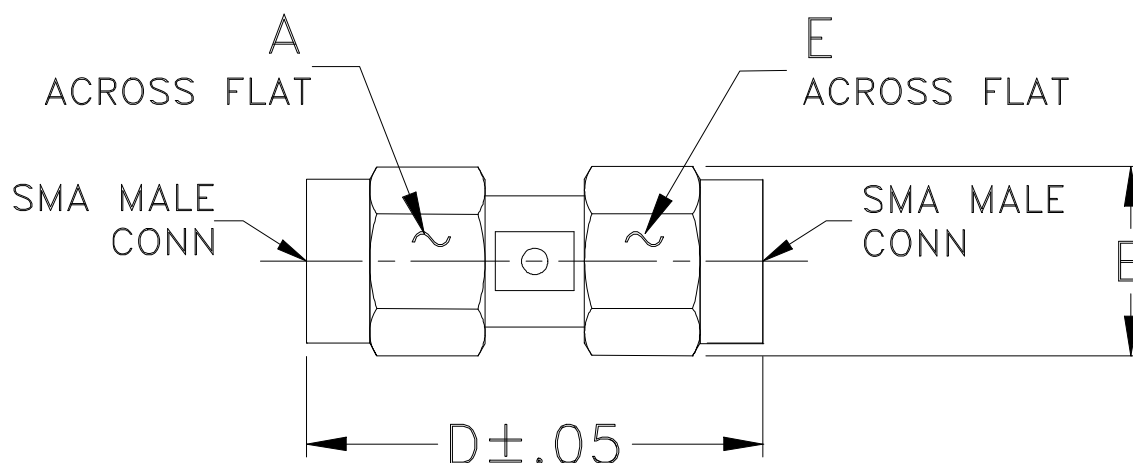

CASE#	A	B	C	D	E	WT. GRAM
DJ951	.312 (7.92)	.36 (9.14)	-- --	.87 (22.10)	.312 (7.92)	4.8

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

1. Case material: Stainless steel.
2. Finish: Passivation.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I