

## COTIZACIÓN N° : 022 - 2295



Lima, viernes 16 de Septiembre del 2022

Señores

**CIENCIA INTERNACIONAL**AV. REPUBLICA DE PANAMA 5768 URB. SAN ANTONIO  
(OFICINA NRO 4), LIMA - LIMA - MIRAFLORES LIMA - -

Atención : CRISTINA SUAREZ

N° Requerimiento:

Referencia : SUMINISTRO ELÉCTRICO EATON.

Distribuidor Autorizado Eaton/ Cutler-Hammer, USA

Distribuidor Autorizado de Toshiba (TIC), USA

Distribuidor Autorizado Square D, USA

Distribuidor Siemens, Alemania

Minería, Industria y Construcción

Oficina Comercial: Av. Los Quechuas 108-Lima 03

Central: (51 1) 437 7677 - 437 7680 - 639 9218, Fax Anx. 24

Calle 6 mz. k Sublote A. Urb. Las Vertientes de la Tablada de Lurin. - Villa El Salvador

Email: ventas@consorcioegperu.com.pe

Web: www.consorcioegperu.com.pe

De acuerdo a su Solicitud, le hacemos llegar a Usted los precios por Suministro de componentes Eléctricos de **EATON**.

ITEM	CÓDIGO	DESCRIPCIÓN DEL PRODUCTO	MARCA	TIEMPO ENTREGA	CANT.	PRECIO LISTA	DSCT. %	TOTAL IMPORTE
1.-	9PX1500IRT2U	9PX UPS 1500VA RT2U (TOWER/RACK 2U), EATON	EATON	INMEDIATA	1.00	1,339.65	20.0	1,071.72

Sub total : \$ 1,071.72

IGV : \$ 192.91

Total : \$ 1,264.63

**CONDICIONES COMERCIALES**

Forma de Pago: CONTADO (depósito/transf. en cuentas bancarias)

Validez de oferta: 30 días

Lugar de entrega: Sus instalaciones Lima.

Moneda: DOLARES AMERICANOS

Conforme a las condiciones comerciales indicadas líneas arriba, considerar lo siguiente: los productos de stock están sujetos a venta previa, el servicio de delivery es por compras mínimas de \$500.00.

Esperando que nuestra propuesta esté de acuerdo con lo solicitado, le saluda muy atentamente y queda a sus órdenes.

**Marco Antonio Berger Espinoza**

REPRESENTANTE DE VENTAS



→ See all Eaton 9PX UPS (1000-3000W) Documentation

→ See all Eaton 9PX (up to 3 kVA) models



## 9PX1500IRT2U

Eaton 9PX 1500W RT2U (tower/rack 2U)

### General

Topology	On-line double conversion with Power Factor Correction (PFC) system
Configuration	Rack/Tower
Part Number	9PX1500IRT2U
Rating (VA/Watts)	1500/1500
Dimensions (H x W x D, mm)	86.5 x 440 x 450
Weight (kg)	18.9
Warranty	3 years electronics, 2 years battery
Rail Kit Included	Yes

### Electrical Input

Connection (1) IEC-320-C14



Input Voltage Range	176-276V without derating (up to 100-276V with derating)
Nominal Voltage	200/208/220/230/240V
Frequency	50/60 Hz autoselection
Frequency Range	40-70 Hz

### Electrical Output

Nominal Voltage 200/208/220/230/240V  
Outlets (8) IEC-320-C13



Efficiency (Normal Mode)	Up to 92.5% in online mode (up to 97.5% in Hi-efficiency mode)
Output Frequency	50/60 Hz autoselect, frequency converter mode


### Battery

2250

2000

- Standard Runtime
- With 1 EBM

**Show:**  
Standard Runtime  
 With 1 EBM

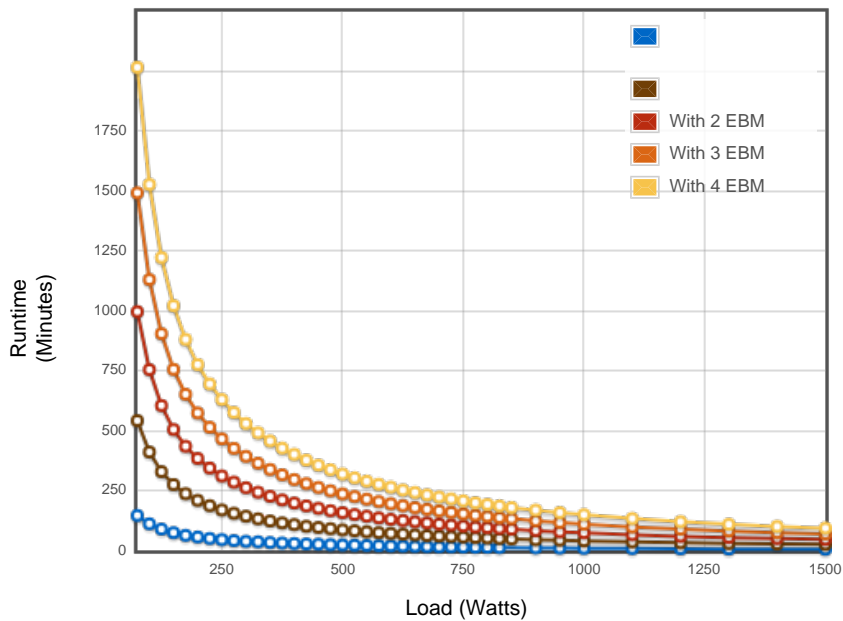

- With 2 EBM
- With 3 EBM
- With 4 EBM

Mouseover graph for detailed runtime values

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Battery Management	ABM® & Temperature compensated charging method (user selectable), Automatic battery test, deep discharge protection, automatic recognition of external battery units
Extended Battery Capability	EBM (2U)

### Communications

User Interface	Multilingual graphical LCD display
Communication Ports	1 USB port + 1 serial RS232 port + 1 mini-terminal block for remote ON/OFF + 1 mini-terminal block for Remote Power Off + 1 mini-terminal block for Output relay
Communication Slot	1 slot for Network-MS card, ModBus-MS or Relay-MS cards.

### Environmental & Standards

Audible Noise	35dB
Operating Temperature	0 to 40°C
Safety markings	IEC/EN 62040-1, UL 1778, CSA 22.2
EMC Markings	IEC/EN 62040 -2 , FCC Class B, CISPR22 Class B
Approvals	CE /CB report (TUV) / cULus / EAC / RCM / KC / Energy Star

In the interests of continuous product improvement all specifications are subject to change without notice.

[Privacy Policy](#)  
[Terms & Conditions](#)  
[Copyright](#)

© 2017 Eaton  
 All Rights Reserved

# Eaton 9PX UPS

1000–3000W



3000W in only 2U!

#### Advanced protection for:

- Small and Medium Datacentre
- IT, Networking, Storage and Telecom
- Infrastructure, Industrial and Medical



## Energy efficient power protection

### Performance and efficiency

- 9PX is the first UPS in its class to provide Unity power factor (VA=W). It delivers 11% more power than any other UPS as well as powering more servers with equivalent VA ratings and lower power factors.
- Energy Star qualified, the 9PX provides the highest efficiency level to reduce energy and cooling costs.
- Double conversion topology. The Eaton 9PX constantly monitors power conditions and regulates voltage and frequency.
- With a versatile Rack/Tower form factor, the 9PX is the most compact solution delivering up to 3000W in only 2U.

### Manageability

- The graphical LCD display provides clear information on the UPS's status and measurements on a single screen. Enhanced configuration capabilities are also available.
- 9PX can meter energy consumption right down to the managed outlet groups. kWh values can be monitored using the LCD or Eaton's Intelligent Power™ Software.
- Load segment control enables prioritised shutdowns of non-essential equipment to maximize battery runtime for critical devices.
- 9PX offers Serial and USB connectivity, plus an extra slot for an optional communication card. Eaton's Intelligent Power Software seamlessly integrates with leading virtualisation environments and cloud orchestrations tools.

### Availability and flexibility

- 9PX 2200 & 3000 are available in RT2U format (optimised for rack mounting) or RT3U (for tower or short-depth racks), pedestal and rail kits are included with all models.
- The internal bypass allows service continuity in case of internal fault, a maintenance bypass is also available (as standard on HotSwap version) for easy replacement of the UPS.
- Stronger, longer battery life: Eaton ABM® battery management technology uses an innovative three-stage charging technique that extends battery life by up to 50%.
- More runtime can be added with up to 4 external hot-swappable battery modules, able to run systems for hours if necessary.



VA =  
Watt

# EATON

Powering Business Worldwide

# Eaton 9PX UPS technical specifications

- Graphical LCD display :
  - Clear information on UPS status and measurements
  - Enhanced configuration capabilities
- Panel for batteries replacement (Hot swappable)
- Slot for Management card (Network card delivered as standard on netpack version)



Eaton 9PX 3000VA

- Outputs: 8 x IEC 10A + 2 x IEC 16A with energy metering (including 2 programmable groups)
- USB port, 1 serial port, Remote ON/OFF, Remote power OFF and Relay output
- External battery (EBM) connector

Technical specifications	1000	1500	2200	3000VA		
Rating (VA/W)	1000VA/1000W	1500VA/1500W	2200VA/2200W	3000VA/3000W		
Format	RT2U (tower/rack 2U)		RT2U (tower/rack 2U) and RT3U (tower/rack 3U)			
<b>Electrical characteristics</b>						
Technology	On-line double conversion with Power Factor Correction (PFC) system					
Nominal voltage	200/208/220/230/240V					
Input voltage range	176-276V without derating (up to 100-276V with derating)					
Input frequency range	40-70Hz, 50/60Hz autoselection, frequency converter mode					
Efficiency	up to 91.5% in online mode (up to 97.5% in Hi-efficiency mode)	up to 92.5% in online mode (up to 97.5% in Hi-efficiency mode)	up to 93.5% in online mode (up to 98% in Hi-efficiency mode)	up to 94% in online mode (up to 98% in Hi-efficiency mode)		
<b>Connections</b>						
Input	1 IEC C14 (10A)		1 IEC C20 (16A) or terminal block on HotSwap MBP HW (Hard-Wired)			
Outputs	8 IEC C13 (10A) sockets		8 IEC C13 (10A) sockets + 2 IEC C19 (16A) sockets			
Outputs on HotSwap models			4 FR/Schuko sockets or 3 BS sockets or 6 IEC 10A sockets or terminal blocks (HW version)			
Switched outlet group	2 outlet groups					
<b>Batteries</b>						
Typical backup times*	300W	500W	800W	1200W	1800W	2500W
9PX 1000	28	16	9			
9PX 1000 + 1 EBM/+4 EBM	134/530	79/316	47/188			
9PX 1500	38	23	13	7		
9PX 1500 + 1 EBM/+4 EBM	143/536	86/319	52/192	32/120		
9PX 2200	43	25	15	9	5	
9PX 2200 + 1 EBM/+4 EBM	206/818	123/491	74/297	47/189	29/118	
9PX 3000	60	36	22	13	7	4
9PX 3000 + 1 EBM/+4 EBM	221/824	135/504	83/307	52/194	33/122	22/82
Battery management	ABM® & temperature compensated charging method (user selectable), automatic battery test, deep discharge protection, automatic recognition of external battery units					
<b>Communication</b>						
Communication ports	1 USB port + 1 serial RS232 port + 1 mini-terminal block for remote ON/OFF + 1 mini-terminal block for remote power off + 1 mini-terminal block for output relay					
Communication slot	1 slot for Network-MS card (included in netpack versions), ModBus-MS or Relay-MS cards					
<b>Operating conditions, standards and approvals</b>						
Operating temperature	0 to 40°C					
Typical noise level	35dB		40dB			
Safety	IEC/EN 62040-1, UL 1778, CSA 22.2					
EMC	IEC/EN 62040 -2, FCC Class B, CISPR22 Class B					
Approvals & markings	CE /CB report (TUV) / cULus / EAC /RCM / KC / Energy Star					
<b>Dimensions H x W x D in mm/ Weight</b>						
UPS	86.5*440*450/17.4kg	86.5*440*450/18.9kg	2U version: 86.5*440*605/25kg 3U version: 130*440*485/24.5kg	2U version: 86.5*440*605/27.6kg 3U version: 130*440*485/27.4kg		
EBM	86.5*440*450/29.8kg		2U version: 86.5*440*605/39.2kg 3U version: 130*440*485/38.2kg			
<b>Customer service and support</b>						
Warranty	3 years on electronics, 2 years on batteries					

\* Backup times are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Parts numbers*	9PX 1kVA	9PX 1.5kVA	9PX 2.2kVA	9PX 3kVA	
UPS RT3U			9PX2200IRT3U	9PX3000IRT3U	
UPS RT2U	9PX1000IRT2U	9PX1500IRT2U	9PX2200IRT2U	9PX3000IRT2U	
UPS RT3U with HotSwap MBP			IEC: 9PX2200IRTBP HW: 9PX2200IRTBPH FR: 9PX2200IRTBPF DIN: 9PX2200IRTBPD BS: 9PX2200IRTBPB	IEC: 9PX3000IRTBP HW: 9PX3000IRTBPH FR: 9PX3000IRTBPF DIN: 9PX3000IRTBPD BS: 9PX3000IRTBPB	
UPS RT2U with Network card	9PX1000IRTN	9PX1500IRTN	9PX2200IRTN	9PX3000IRTN	
EBM	9PXEbm48RT2U		2U: 9PXEbm72RT2U 3U: 9PXEbm72RT3U		
2m battery connection cable	EBMCBL48		EBMCBL72		
Battery integration system	BINTSYS				

\*All 9PX UPS and EBM are delivered with rack kit



# CUENTAS BANCARIAS

BANCO	MONEDA	CUENTA CORRIENTE	CUENTA INTERBANCARIA
	SOLES	191-2274544-0-90	00219100227454409053
	DOLARES	191-2206100-1-48	002-191-002206100148-57
	SOLES	011-0136-0100030691	011-136-000100030691-98
	DOLARES	0011-0136-0100025108	011-136-000100025108-90
	SOLES	000-6165958	-
	DOLARES	000-4877081	-
	SOLES	041-3001674366	003-041-003001674366-15
	DOLARES	041-3001674373	003-041-003001674373-11